ASTM D-5059
Lead Standards

Lead blank

Lead blank	Solution contains 0 µg/g Pb(2+) in iso-Octane	100 ml	CL11.1201.0100

ASTM D-6304
Karl Fischer Water Standards

Water

Water	1,0% Water in 10W30 motor oil	100 ml	CL11.2304.0100
Water	0,5% Water in 10W30 motor oil	100 ml	CL11.2303.0100
Water	0,1% Water in 10W30 motor oil	100 ml	CL11.2302.0100
Water	Solvent blank (10W30 motor oil)	100 ml	CL11.2301.0100

Don't see the exact solution you need?
E-mail us the Tailor Made Standard Quotation request form in the back of the catalog.

CHEM-LAB NV - BELGIUM - Tel. +32 (0)50 28 83 20 - Fax +32 (0)50 78 26 54 - info@chem-lab.be - www.chem-lab.be

ASTM D-4927, D-6481, D-6443 and others
Sulfur And Metals in Lubricating Oil Multi Element Standards

Lubricating oil (4E) standard solution — CL11.13550

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

	± 1 %
Ca 100 µg/g	
P 1250 µg/g	
S 6000 µg/g	
Zn 600 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13550.0100	100 ml	GVB

Lubricating oil (4E) standard solution — CL11.13548

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

	± 1 %
Ca 50 µg/g	
P 0 µg/g	
S 5.500 µg/g	
Zn 1.400 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13548.0100	100 ml	GVB

Lubricating oil (4E) standard solution — CL11.13546

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

	± 1 %
Ca 750 µg/g	
P 2.250 µg/g	
S 5.000 µg/g	
Zn 1.500 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13546.0100	100 ml	GVB

Lubricating oil (4E) standard solution — CL11.13549

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

	± 1 %
Ca 1000 µg/g	
P 100 µg/g	
S 4.500 µg/g	
Zn 2.500 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13549.0100	100 ml	GVB

Lubricating oil (4E) standard solution — CL11.13545

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

	± 1 %
Ca 3.500 µg/g	
P 400 µg/g	
S 4.000 µg/g	
Zn 1.100 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13545.0100	100 ml	GVB

Lubricating oil (4E) standard solution — CL11.13552

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

	± 1 %
Ca 250 µg/g	
P 1.750 µg/g	
S 3.500 µg/g	
Zn 1.000 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13552.0100	100 ml	GVB

Lubricating oil (4E) standard solution — CL11.13539

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

	± 1 %
Ca 0 µg/g	
P 200 µg/g	
S 3.000 µg/g	
Zn 1.750 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13539.0100	100 ml	GVB

ASTM D-4927, D-6481, D-6443 and others
Sulfur And Metals in Lubricating Oil Multi Element Standards

Lubricating oil (4E) standard solution — CL11.13551

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

Ca 1500 µg/g	± 1 %
P 1000 µg/g	
S 2500 µg/g	
Zn 900 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13551.0100	100 ml	GVB

Lubricating oil (4E) standard solution — CL11.13547

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

Ca 500 µg/g	± 1 %
P 1.500 µg/g	
S 2.000 µg/g	
Zn 2.000 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13547.0100	100 ml	GVB

Lubricating oil (4E) standard solution — CL11.13542

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

Ca 4.000 µg/g	± 1 %
P 2.000 µg/g	
S 1.750 µg/g	
Zn 500 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13542.0100	100 ml	GVB

Lubricating oil (4E) standard solution — CL11.13540

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

Ca 5.000 µg/g	± 1 %
P 300 µg/g	
S 1.500 µg/g	
Zn 700 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13540.0100	100 ml	GVB

Lubricating oil (4E) standard solution — CL11.13544

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

Ca 2.500 µg/g	± 1 %
P 500 µg/g	
S 1.250 µg/g	
Zn 0 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13544.0100	100 ml	GVB

Lubricating oil (4E) standard solution — CL11.13541

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

Ca 3.000 µg/g	± 1 %
P 600 µg/g	
S 1.000 µg/g	
Zn 1.300 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13541.0100	100 ml	GVB

Lubricating oil (4E) standard solution — CL11.13543

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

Ca 2.000 µg/g	± 1 %
P 800 µg/g	
S 750 µg/g	
Zn 1.200 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13543.0100	100 ml	GVB

CHEM-LAB NV - BELGIUM - Tel. +32 (0)50 28 83 20 - Fax +32 (0)50 78 26 54 - info@chem-lab.be - www.chem-lab.be

ASTM D-4927, D-6481, D-6443 and others
Sulfur And Metals in Lubricating Oil Multi Element Standards

Lubricating oil (4E) standard solution — CL11.13538

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

	± 1 %
Ca 6.000 µg/g	
P 50 µg/g	
S 500 µg/g	
Zn 800 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13538.0100	100 ml	GVB

Lubricating oil (4E) standard solution — CL11.13537

Standard acc. ASTM D-4927, D-6481, D-6443 — Solution contains stated concentration in Lubricating oil

Density 0.85 g/ml
HS Nr 38220000

	± 1 %
Ca 0 µg/g	
P 0 µg/g	
S 0 µg/g	
Zn 0 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13537.0100	100 ml	GVB

Sulfur And Metals in Oil Multi Element Standards

Sulfur & Metals (4E) standard solution — CL11.13532

*High quality standard sol. for XRF — Solution contains stated concentration in 20 cSt hydrocarbon oil

Density 0.85 g/ml
HS Nr 38220000

	± 1 %
Fe 50 µg/g	
Ni 40 µg/g	
S 55.000 µg/g	
V 400 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13532.0100	100 ml	GVB

Sulfur & Metals (4E) standard solution — CL11.13536

*High quality standard sol. for XRF — Solution contains stated concentration in 20 cSt hydrocarbon oil

Density 0.85 g/ml
HS Nr 38220000

	± 1 %
Fe 100 µg/g	
Ni 0 µg/g	
S 50000 µg/g	
V 50 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13536.0100	100 ml	GVB

Sulfur & Metals (4E) standard solution — CL11.13529

*High quality standard sol. for XRF — Solution contains stated concentration in 20 cSt hydrocarbon oil

Density 0.85 g/ml
HS Nr 38220000

	± 1 %
Fe 250 µg/g	
Ni 60 µg/g	
S 45.000 µg/g	
V 100 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13529.0100	100 ml	GVB

Sulfur & Metals (4E) standard solution — CL11.13530

*High quality standard sol. for XRF — Solution contains stated concentration in 20 cSt hydrocarbon oil

Density 0.85 g/ml
HS Nr 38220000

	± 1 %
Fe 350 µg/g	
Ni 30 µg/g	
S 40.000 µg/g	
V 200 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13530.0100	100 ml	GVB

Sulfur & Metals (4E) standard solution — CL11.13531

*High quality standard sol. for XRF — Solution contains stated concentration in 20 cSt hydrocarbon oil

Density 0.85 g/ml
HS Nr 38220000

	± 1 %
Fe 200 µg/g	
Ni 50 µg/g	
S 35.000 µg/g	
V 0 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13531.0100	100 ml	GVB

Sulfur & Metals (4E) standard solution — CL11.13535

*High quality standard sol. for XRF — Solution contains stated concentration in 20 cSt hydrocarbon oil

Density 0.85 g/ml
HS Nr 38220000

Fe 150 µg/g	± 1 %
Ni 70 µg/g	
S 30.000 µg/g	
V 25 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13535.0100	100 ml	GVB

Sulfur & Metals (4E) standard solution — CL11.13526

*High quality standard sol. for XRF — Solution contains stated concentration in 20 cSt hydrocarbon oil

Density 0.85 g/ml
HS Nr 38220000

Fe 400 µg/g	± 1 %
Ni 100 µg/g	
S 25.000 µg/g	
V 250 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13526.0100	100 ml	GVB

Sulfur & Metals (4E) standard solution — CL11.13533

*High quality standard sol. for XRF — Solution contains stated concentration in 20 cSt hydrocarbon oil

Density 0.85 g/ml
HS Nr 38220000

Fe 450 µg/g	± 1 %
Ni 20 µg/g	
S 20.000 µg/g	
V 300 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13533.0100	100 ml	GVB

Sulfur & Metals (4E) standard solution — CL11.13534

*High quality standard sol. for XRF — Solution contains stated concentration in 20 cSt hydrocarbon oil

Density 0.85 g/ml
HS Nr 38220000

Fe 500 µg/g	± 1 %
Ni 5 µg/g	
S 15.000 µg/g	
V 150 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13534.0100	100 ml	GVB

Sulfur & Metals (4E) standard solution — CL11.13528

*High quality standard sol. for XRF — Solution contains stated concentration in 20 cSt hydrocarbon oil

Density 0.85 g/ml
HS Nr 38220000

Fe 0 µg/g	± 1 %
Ni 80 µg/g	
S 10.000 µg/g	
V 350 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13528.0100	100 ml	GVB

Sulfur & Metals (4E) standard solution — CL11.13527

*High quality standard sol. for XRF — Solution contains stated concentration in 20 cSt hydrocarbon oil

Density 0.85 g/ml
HS Nr 38220000

Fe 300 µg/g	± 1 %
Ni 10 µg/g	
S 5.000 µg/g	
V 500 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13527.0100	100 ml	GVB

Sulfur & Metals (4E) standard solution — CL11.13525

*High quality standard sol. for XRF — Solution contains stated concentration in 20 cSt hydrocarbon oil

Density 0.85 g/ml
HS Nr 38220000

Fe 0 µg/g	± 1 %
Ni 0 µg/g	
S 0 µg/g	
V 0 µg/g	

Art. Nr.	Pack	Pack Type
CL11.13525.0100	100 ml	GVB

CHEM-LAB NV - BELGIUM - Tel. +32 (0)50 28 83 20 - Fax +32 (0)50 78 26 54 - info@chem-lab.be - www.chem-lab.be

Sulfur and Nitrogen Multi Element Standards (Kits)

Nitrogen - Sulfur kit in iso-Octane

CL48.1405

Standard acc. ASTM analysis of N & S

Kit contains (1.0 - 1.0), (5.0 - 5.0), (10 - 20), (15 - 35), (20 µg/ml S - 50 µg/ml N)

Density 0.69 g/ml
HS Nr 38220000

UN 1262
ADR 3,II
IATA 3,II
IMDG 3,II

- Amp. 1: iso-Octane blank
- Amp. 2: 1 µg/ml S & 1 µg/ml N in iso-Octane
- Amp. 3: 5 µg/ml S & 5 µg/ml N in iso-Octane
- Amp. 4: 10 µg/ml S & 20 µg/ml N in iso-Octane
- Amp. 5: 15 µg/ml S & 35 µg/ml N in iso-Octane
- Amp. 6: 20 µg/ml S & 50 µg/ml N in iso-Octane

Volume: 2 ml ampules

Art. Nr.	Pack	Pack Type
CL48.1405.0001	1 pck	cart.box

ASTM D-5623
Sulfur Compounds in Isooctane/Toluene/n-Hexane

Sulfur Compounds Mix 2 (22C) standard solution

CL40.13749

Standard acc. ASTM D-5623

Solution contains 50 µg/g in iso-Octane/Toluene/n-Hexane (2/1/2)

Density 0.66 g/ml
HS Nr 38220000

UN 1208
ADR 3,II
IATA 3,II
IMDG 3,II

- 2-Methyl 1 propanethiol (50 µg/g S)
- 2-Methylthiophene (50 µg/g S)
- 3-Methylthiophene (50 µg/g S)
- 1,2-Ethan dithiol (50 µg/g)
- 1-Pentanethiol (50 µg/g)
- 2-Ethylthiophene (50 µg/g)
- Propylsulfide (50 µg/g)
- T-Butyldisulfide (50 µg/g)
- 1,5-Pentanedithiol (50 µg/g)
- 1-Nonanethiol (50 µg/g)
- 1-Decathiol (50 µg/g)
- Propanethiol (50 µg/g)
- T-Butylsulfide (50 µg/g)
- 1-Heptanethiol (50 µg/g)
- 1,4-Butanedithiol (50 µg/g)
- Methyl ethyl sulfide (50 µg/g)
- Propyl disulfide (50 µg/g)
- 1-Octanethiol (50 µg/g)
- Benzothiophene (50 µg/g)
- 1-Hexanethiol (50 µg/g)
- Carbon disulfide (50 µg/g)
- Methyl sulfide (50 µg/g)

Art. Nr.	Pack	Pack Type
CL40.13749.0002	2 ml	AMP

Sulfur Compounds Mix 1 (14C) standard solution

CL40.13748

Standard acc. ASTM D-5623

Solution contains 100 µg/g in iso-Octane/Toluene/n-Hexane (2/1/2)

Density 0.66 g/ml
HS Nr 38220000

UN 1208
ADR 3,II
IATA 3,II
IMDG 3,II

- Methanethiol (100 µg/g S)
- Ethanethiol (100 µg/g S)
- Dimethylsulfide (100 µg/g S)
- 2-Propanethiol (100 µg/g S)
- T-Butanethiol (100 µg/g S)
- 1-Propanethiol (100 µg/g S)
- Thiophene (100 µg/g S)
- Diethylsulfide (100 µg/g S)
- 1-Butanethiol (100 µg/g S)
- Diethyl disulfide (100 µg/g S)
- Thiophenol (100 µg/g S)
- Benzothiophene (100 µg/g S)
- Bromothiophene (100 µg/g S)
- Diphenyl sulfide (100 µg/g S)

Art. Nr.	Pack	Pack Type
CL40.13748.0002	2 ml	AMP

ASTM-6379
Aromatic Hydrocarbon

D-6379 Calibration kit in n-Heptane

CL48.0401

Standard acc. ASTM Method D-6379 -

Density 0.791 g/ml
HS Nr 38220000

UN 1206
ADR 3,II
IATA 3,II
IMDG 3,II

Volume: 1 ml ampules

Art. Nr.	Pack	Pack Type
CL48.0401.0001	1 pck	cart.box

ASTM D-3230
Salts in Crude Oil

Multi Element (3E) Standard solution — CL11.13026

*High quality standard sol. for ASTM D-3230 — Solution contains stated concentration in Butanol:Methanol (63:37)

Density 0.80 g/ml
HS Nr 38220000

UN 1993
ADR 3,III
IATA 3,III
IMDG 3,III

- CaCl2 10 µg/ml
- MgCl2 20 µg/ml
- NaCl 70 µg/ml

Art. Nr.	Pack	Pack Type
CL11.13026.0500	500 ml	PE/H

ASTM D-2887, D-7096, D-7169
Boiling Range Determination Standards

Boiling Range Determination (20C) standard solution — CL40.13752

Standard for ASTM D-2887 Quantitative Calibration — Solution contains stated concentration in Carbon disulfide

Mol.Weight 76.14 g/mol
Density 1.26 g/ml
HS Nr 38220000

UN 1131
ADR 3 (6.1),I
IATA 3 (6.1),I
IMDG 3 (6.1),I

HNrs H225-H319-H315-H361-H372
PNrs P210-P233-P280-P281-P302 + P352-P305 + P351 + P338-P314

DANGER.

- n-Decane (0,5 % w/w)
- n-Dodecane (0,5 % w/w)
- n-Dotriacontane (0,5 % w/w)
- n-Eicosane (0,5 % w/w)
- n-Heptadecane (0,5 % w/w)
- n-Heptane (0,5 % w/w)
- n-Hexadecane (1,0 % w/w)
- n-Hexane (0,5 % w/w)
- n-Hexatriacontane (0,5 % w/w)
- n-Nonane (0,5 % w/w)
- n-Octacosane (0,5 % w/w)
- n-Octadecane (1,0 % w/w)
- n-Octane (0,5 % w/w)
- n-Pentadecane (0,5 % w/w)
- n-Pentane (0,5 % w/w)
- n-Tetracontane (0,5 % w/w)
- n-Tetracosane (0,5 % w/w)
- n-Tetradecane (0,5 % w/w)
- n-Tetratetracontane (0,5 % w/w)
- n-Undecane (0,5 % w/w)

Art. Nr.	Pack	Pack Type
CL40.13752.0001	1 ml	AMP

Boiling Range Determination (16C) standard solution — CL40.13751

Standard for ASTM D-7096 Quantitative Calibration Mix — Solution contains stated concentration

Density 0.79 g/ml
HS Nr 38220000

UN 1993
ADR 3,II
IATA 3,II
IMDG 3,II

- Butylbenzene (3,5 % w/w)
- n-Decane (3,5 % w/w)
- 2,4-Dimethylpentane (5,8 % w/w)
- n-Dodecane (3,5 % w/w)
- n-Heptane (10,5 % w/w)
- n-Hexane (5,8 % w/w)
- 2-Methylbutane (10,5 % w/w)
- 2-Methylpentane (5,8 % w/w)
- n-Octane (5,8 % w/w)
- n-Pentadecane (2,3 % w/w)
- n-Pentane (8,1 % w/w)
- Propylbenzene (4,7 % w/w)
- n-Tetradecane (2,3 % w/w)
- Toluene (11,6 % w/w)
- n-Tridecane (2,3 % w/w)
- p-Xylene (14,0 % w/w)

Art. Nr.	Pack	Pack Type
CL40.13751.0001	1 ml	AMP

Boiling Range Determination (2C) standard solution — CL40.13750

Standard for ASTM D-2887 and D-7169 Column Resolution Test — Solution contains 1% (w/v) in n-Octane

Density 0.69 g/ml
HS Nr 38220000

UN 1262
ADR 3,II
IATA 3,II
IMDG 3,II

HNrs H225-H304-H315-H336-H410
PNrs P210-P240-P273-P301 + P310-P331-P403 + P235

DANGER.

- Hexadecane
- Octadecane

Art. Nr.	Pack	Pack Type
CL40.13750.0001	1 ml	AMP

CHEM-LAB NV - BELGIUM - Tel. +32 (0)50 28 83 20 - Fax +32 (0)50 78 26 54 - info@chem-lab.be - www.chem-lab.be

ASTM D-3798
p-Xylene Impurity Standards

p-Xylene Impurity Mix with ISTD (11C) standard solution

NEW CL40.13797

High quality standard solution for ASTM D-3798

Solution contains stated concentrations

Density 0.86 g/ml
HS Nr 38220000

UN 1307
ADR 3,III
IATA 3,III
IMDG 3,III

HNrs H226-H332-H312-H315
PNrs P302 + P352
WARNING.

n-Pentane (0.15 %w/w)
n-Octane (0.15 %w/w)
Benzene (0.15 %w/w)
Toluene (0.15 %w/w)
Ethylbenzene (0.15 %w/w)
p-Xylene (98.65 %w/w)
m-Xylene (0.15 %w/w)
o-Xylene (0.15 %w/w)
Cumene (0.15 %w/w)
Propylbenzene (0.15 %w/w)
n-Undecane ISTD (0.50 %w/w)

Art. Nr.	Pack	Pack Type
CL40.13797.0001	1 ml	AMP

p-Xylene Impurity Mix (10C) standard solution

NEW CL40.13798

High quality standard solution for ASTM D-3798

Solution contains stated concentrations

Density 0.86 g/ml
HS Nr 38220000

UN 1307
ADR 3,III
IATA 3,III
IMDG 3,III

HNrs H226-H332-H312-H315
PNrs P302 + P352
WARNING.

n-Pentane (0.15 %w/w)
n-Octane (0.15 %w/w)
Benzene (0.15 %w/w)
Toluene (0.15 %w/w)
Ethylbenzene (0.15 %w/w)
p-Xylene (98.65 %w/w)
m-Xylene (0.15 %w/w)
o-Xylene (0.15 %w/w)
Cumene (0.15 %w/w)
Propylbenzene (0.15 %w/w)

Art. Nr.	Pack	Pack Type
CL40.13798.0010	10 ml	AMP

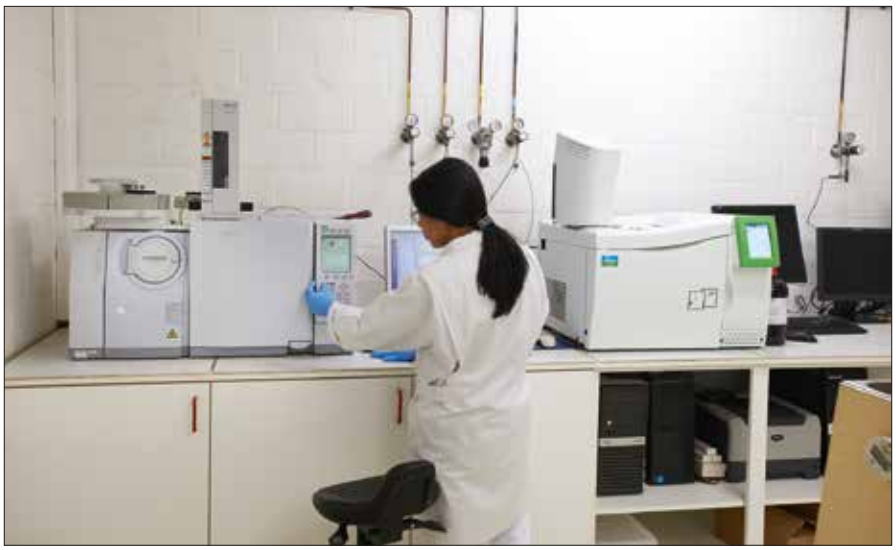

Hydrocarbon Test Mix (28C) standard solution

NEW CL40.13799

High Quality Standard solution for ASTM D-5443

Solution contains stated concentrations

Density 0.79 g/ml
HS Nr 38220000

UN 1993
ADR 3,II
IATA 3,II
IMDG 3,II

HNrs H225-H319-H336-EUH066
PNrs P210-P240-P305 + P351 + P338

DANGER.

Cyclopentane (1 %w/w)	Benzene (2.25 %w/w)
n-Pentane (1 %w/w)	Toluene (2.25 %w/w)
Cyclohexane (2 %w/w)	trans-Decahydronaphthalene (4.25 %w/w)
2,3-Dimethylbutane (2 %w/w)	n-Tetradecane (4.5 %w/w)
n-Hexane (2 %w/w)	Ethylbenzene (4.5 %w/w)
1-Hexene (1.5 %w/w)	o-Xylene (4.25 %w/w)
Methylcyclohexane (4.25 %w/w)	n-Propylbenzene (5 %w/w)
4-Methyl-1-hexene (1.5 %w/w)	1,2,4-Trimethylbenzene (4.5 %w/w)
n-Heptane (3.5 %w/w)	1,2,3-Trimethylbenzene (5 %w/w)
1,2-Dimethylcyclohexane (5 %w/w)	1,2,4,5-Tetramethylbenzene (5 %w/w)
Isooctane (5 %w/w)	Pentamethylbenzene (5 %w/w)
n-Octane (5 %w/w)	
1,2,4-Trimethylcyclohexane (4.25 %w/w)	
n-Nonane (4.5 %w/w)	
n-Decane (4.25 %w/w)	
n-Undecane (3.5 %w/w)	
n-Dodecane (3.25 %w/w)	

Art. Nr.	Pack	Pack Type
CL40.13799.0001	1 ml	AMP

REGISTERED ISO 9001 ANT97141.1 by LRQA

ACCREDITED ISO 17025 531-CAL by BELAC

ACCREDITED ISO GUIDE 34 531-RM by BELAC

CHEM-LAB NV - BELGIUM - Tel. +32 (0)50 28 83 20 - Fax +32 (0)50 78 26 54 - info@chem-lab.be - www.chem-lab.be

ASTM D-5175 Standard Test Method for Organohalide Pesticides and Polychlorinated Biphenyls in Water by Microextraction and GC

Organohalide Pesticides Mix (16C) standard solution

CL40.13772

High quality standard for GC, EPA METHOD 505, ASTM D-5175 Solution contains stated concentration in Methanol

Density 0.79 g/ml
HS Nr 38220000
UN 1230
ADR 3 (6.1),II
IATA 3 (6.1),II
IMDG 3 (6.1),II
HNrs H225-H331-H311-H301-H370
PNrs P210-P233-P280-P302 + P352-P309 + P310

DANGER.

alfa-Chlordane (1 µg/ml)
Alachlor (10 µg/ml)
Aldrin (1 µg/ml)
Atrazine (250 µg/ml)
cis-Nonachlor (1 µg/ml)
Dieldrin (1 µg/ml)
Endrin (1 µg/ml)
gamma-Chlordane (1 µg/ml)
Heptachlor (1 µg/ml)
Heptachlor epoxide (isomer B) (1 µg/ml)
Hexachlorobenzene (1 µg/ml)
Hexachlorocyclopentadiene (1 µg/ml)
Lindane (1 µg/ml)
Methoxychlor (5 µg/ml)
Simlazine (250 µg/ml)
trans-Nonachlor (1 µg/ml)

Art. Nr.	Pack	Pack Type
CL40.13772.0001	1 ml	AMP

Tailor Made Mixtures can be formulated to meet your special applications.